



### MAIN PARAMETERS

|                               |                     |
|-------------------------------|---------------------|
| Dimensions                    | 229 x 105 x 102 cm  |
| Safety area                   | 527 x 400 cm        |
| Safety area (m <sup>2</sup> ) | 19,2 m <sup>2</sup> |
| Free fall height (HIC)        | 20 cm               |
| Recommended age group         | 2-10 years          |
| Recommended number of users   | 2 person            |
| Complies with Standards       | EN 1176-1           |
| Platform area                 | 0,39 m <sup>2</sup> |

### FUNCTIONS

|              |      |
|--------------|------|
| Chain bridge | 1 pc |
|--------------|------|





BALANCING



INTERACTION

TECHNICAL DATA SHEET  
**BALANCE TRACK - CHAIN BRIDGE**  
BLFJ601B


broa.

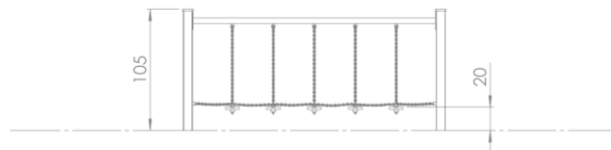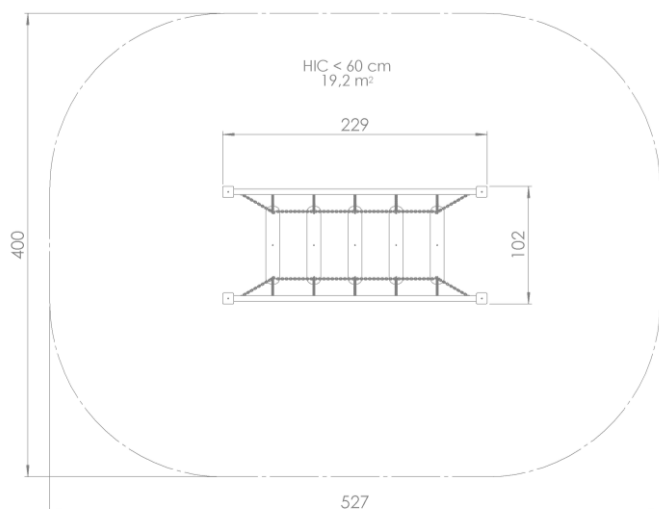

**SAFETY AREA**

|              |                     |
|--------------|---------------------|
| HIC <60 cm   | 19,2 m <sup>2</sup> |
| HIC in Total | 19,2 m <sup>2</sup> |

**MATERIAL USAGE**



**Construction:** 80 x 80 mm, S235 carbon steel hollow section, covered. Surface treatment: hot dip galvanised, 2 layers of PE powder coating (60-70 µm per layer).



**Bars:** S235 carbon steel pipe. Surface treatment: hot dip galvanised, 2 layers PE powder coating (60-70 µm per layer).



**Platforms:** 19 mm, UV resistant, anti-slip HDPE plate.



**Fasteners, chains:** stainless steel.



**End Cap:** 15 mm, contour milled, UV resistant HDPE plate.